

# EVAC 5 Voice evacuation ceiling loudspeaker




## FREQUENCY DIAGRAMS


### TECHNICAL SPECIFICATIONS

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| Rated power            | 6 W                                                      |
| Transformer power taps | 6 W - 3 W - 1,5 W - 0,75 W - 0,25 W                      |
| Sensitivity            | 93 dB (1 W/1 m)                                          |
| Maximum SPL            | 106 dB (Pmax/1 m) at 1584 Hz                             |
| Frequency response     | 240 Hz – 20 kHz                                          |
| Dispersion at 1000 Hz  | 170° conical                                             |
| Driver dimensions      | 5" (127 mm)                                              |
| Dimensions             | ø 185 mm x 118 mm                                        |
| Weight                 | 1,3 kg                                                   |
| Material               | Steel                                                    |
| Colour                 | Speaker - white (RAL 9016), fire dome - black (RAL 9005) |

### FREQUENCY RESPONSE

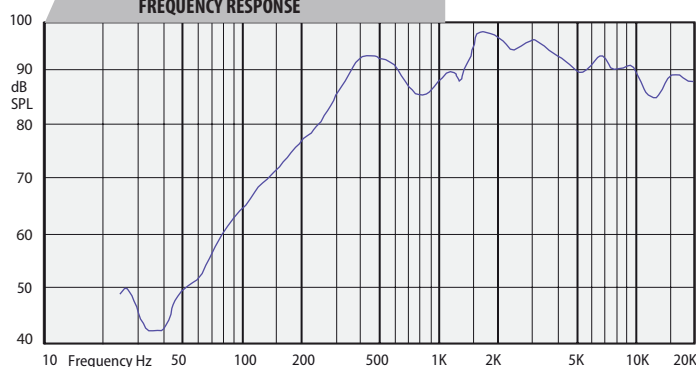

### IMPEDANCE

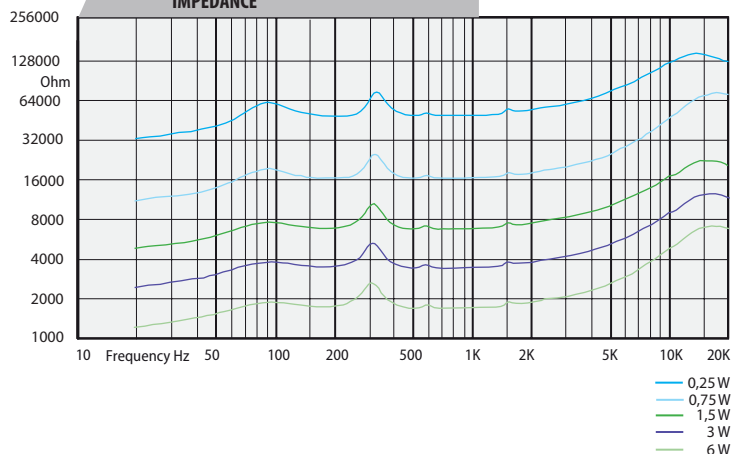

### HORIZONTAL / VERTICAL POLAR DIAGRAMS

