

EVAC 6 Metal ceiling loudspeaker with fire dome




FREQUENCY DIAGRAMS


TECHNICAL SPECIFICATIONS

Rated power	10 W
Transformer power taps	10 W – 5 W – 2,5 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax/1 m) at 2420 Hz
Frequency response	150 Hz – 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm)
Dimensions	ø 200 mm x 101 mm
Weight	1,43 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - orange (RAL 2008)

FREQUENCY RESPONSE

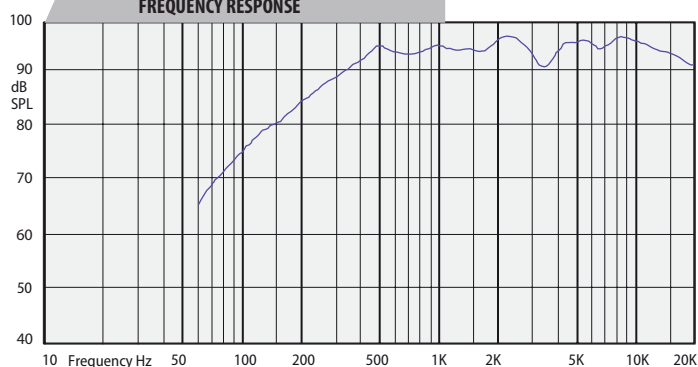

IMPEDANCE

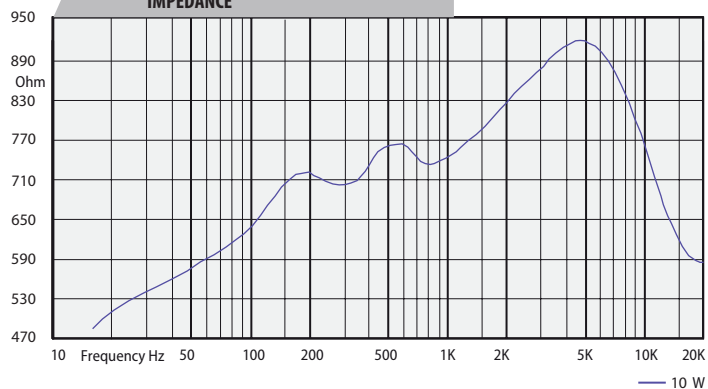

HORIZONTAL / VERTICAL POLAR DIAGRAMS

