


FREQUENCY DIAGRAMS


TECHNICAL SPECIFICATIONS

Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	104 dB (Pmax/1 m) at 3651 Hz
Frequency response	150 Hz – 18 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 180 mm x 130 mm
Weight	1,32 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - orange (RAL 2008)




FREQUENCY RESPONSE

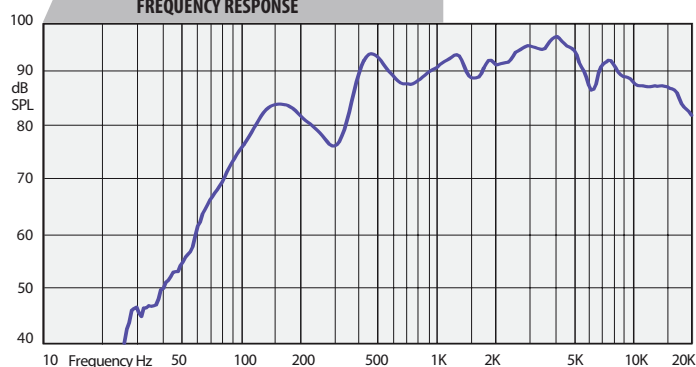

IMPEDANCE

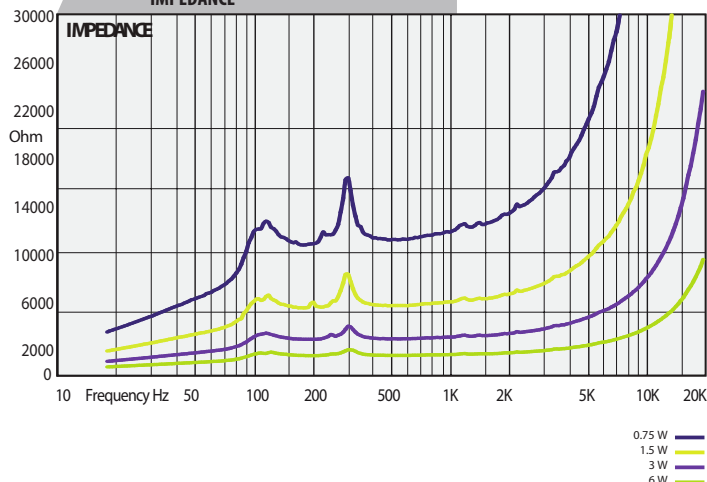

HORIZONTAL / VERTICAL POLAR DIAGRAMS



— Horizontal / Vertical