




VIVA 3 302T Wall mount plastic loudspeakers

FREQUENCY DIAGRAMS


TECHNICAL SPECIFICATIONS

Rated power	25 W (8 Ω)
Transformer power taps at 100 V	15 W - 7,5 W - 3 W
Sensitivity	87 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax /1 m) at 8137 Hz
Frequency response	150 Hz – 20 kHz
Dispersion at 1000 Hz	170° (H) x 180° (V)
Driver dimensions	3" (76 mm) woofer, 1" (25 mm) tweeter
Dimensions	200 mm x 113 mm x 133 mm
Weight	1,5 kg
Material	Housing - ABS plastic, U- bracket and grill - metal
Colour	White (RAL 9016), Papyrus white (RAL 9018), Black (RAL 9017)

FREQUENCY RESPONSE



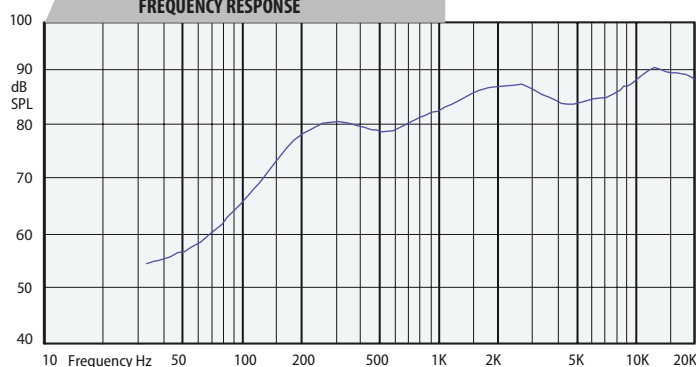


IMPEDANCE

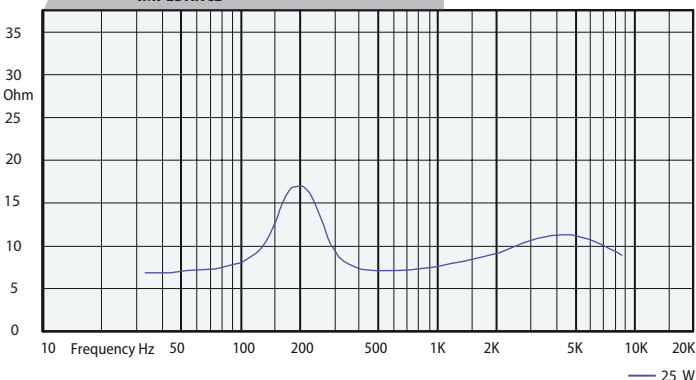

— 25 W

HORIZONTAL / VERTICAL POLAR DIAGRAMS



— Horizontal — Vertical